



GIVES YOU THE POWER

THE POWER OF GERMAN QUALITY

PRODUCT GUIDE





Henkel, one of the world's leading Adhesive Technologies, Laundry & Homecare and Beauty Care manufacturers was founded in Dusseldorf in 1876.

TRUST



A name you can trust.

Today Henkel employs over 47,000 staff and is known for its household brand names like Pattex, Metylan, Tangit, Loctite, Persil, Fa & Taft.



The world leaders in Adhesive Technologies.

With two of the world's leading adhesive brands - Pattex and Metylan - Henkel provides adhesives, sealants and surface treatment solutions to more than 75 countries worldwide.

CONTENTS

● CONTACT ADHESIVES & WOOD GLUE	01
● MONTAGE ADHESIVES	07
● PROFESSIONAL SEALANTS	11
● PU FOAMS	17
● SUPER GLUES	21
● HVAC SOLUTIONS	25
● POWER EPOXIES	29
● WALLPAPER ADHESIVES & PASTES	33
● PIPE ADHESIVES, CLEANER AND SEALING CORDS	37



Established in 1956, Pattex has become the first name in superior bonding solutions for professionals, craftsmen and the construction industry. Pattex products include contact adhesives, wood glues, pipe adhesives, sealants, PU foams, superglues, and many other adhesive and bonding solutions.



Since 1953, Metylan has been providing powder based wallpaper pastes for professional use, and offers a complete range of pastes for every type of wallpaper.



Tangit products have been built on over 50 years of extensive research and experience, thus ensuring consistent outstanding product quality. It offers a variety of different pressure pipe adhesives and cleaners as professional solutions for thread sealing, passive fire protection and the installation of house led-ins.

Pattex Heritage

Powerful & high-quality products which will hold their promise.



1925 1926 1956 1973 1988 1998 2010 2011 2012 2013 2014

A tradition of successful product inventions since 1925, always developed in cooperation with German craftsmen.



CONTACT ADHESIVES & WOOD GLUE



HIGH PERFORMANCE ADHESIVES FOR THE RELIABLE BONDING OF A WIDE RANGE OF MATERIALS



SAVE TIME INCREASE PERFORMANCE




CONTACT ADHESIVE PREMIUM



Temperature resistant Contact Adhesive (from -40°C to +110°C) provides reliable UV-stability and bonding strength, it can also be used for the bonding of protection boards and soundproofing panels (bituminous, rubber, PVC) to numerous substrates such as PVC, EPDM, HDPE, bituminous membranes.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ High bonding strength
- ✓ Excellent heat resistance (up to 110°C)
- ✓ Chemical resistance

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1700711	Pattex Contact Adhesive 650ml	12
1966743	Pattex Contact Adhesive 2.5L	4
1700698	Pattex Contact Adhesive 3L	4


CONTACT ADHESIVE CARPET



Chloroprene rubber based adhesive for carpet fixing. Recommended for bonding of carpet backing with various substrates. Also suitable for bonding composite panels, wood & aluminum items, boards, leather rubber sheets, carpet backing and other items.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Walk-able after 2 hours
- ✓ Absorbent & non-absorbent floors
- ✓ Fire resistance

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1678505	Pattex Contact Adhesive 600ml	24


CONTACT ADHESIVE SPRAYABLE



High heat-resistant (from -40°C to +110°C), No Toluene or Methylenechloride, Homogeneous adhesive film, Clean and controlled spray ability, Extreme short evaporation time, High initial tack, High coverage & efficiency, Aerosol free and user-friendly application. Suitable for bonding absorbent and non-absorbent substrates, also in combination with metal, wood and wooden materials, foam, furniture, linoleum, rubber etc. Fixing of veneer stripes on edges and curves. For isolation of cutting edges against humidity. Combination-fixing of isolation panels made of mineral wool or carton on metal Not suitable for foamed polystyrene (Styrofoam), Styropor, PE, PP, PTFE and soft PVC.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ High coverage & efficiency
- ✓ High heat resistance (up to 110°C)
- ✓ High time efficiency

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1419348	Pattex Contact Adhesive (SPRAY) 5L	4


CONTACT ADHESIVE STANDARD



Temperature Resistant Contact Adhesive (from -10°C to +70°C). It can also be used to bond all types of fibrous insulation material to G.I, aluminium sheets and to other metals. As well as recommended for bonding various materials; light wood, heavy wood, protection boards, cork, PVC.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Temperature resistance (up to +70°C)
- ✓ Indoor and outdoor applications

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1685701	Pattex Contact Adhesive 650ml	12
1685710	Pattex Contact Adhesive 3L	4


CONTACT ADHESIVE TUBES



PATTEX CONTACT ADHESIVE CLASSIC is a Strong, universal, heat-resistant, and fast-curing, Polychloroprene based formula. Free of harmful substances. Pattex Classic is user friendly and perfectly suitable for multi-material assembling jobs (wood, leather, metal porcelain, rubber, most resin laminates). To apply with brush or spatula.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Strong
- ✓ Universal
- ✓ Fast curing

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
177384	Pattex Contact Adhesive 50g (Classic)	12

WOOD GLUE CLASSIC D1



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Assembling & repairing
- ✓ Indoor use

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1700174	Pattex Wood Glue D1 1Kg	12
1700697	Pattex Wood Glue D1 3Kg	4
1767640	Pattex Wood Glue D1 5Kg	4
1700040	Pattex Wood Glue D1 18Kg	-
1784979	Pattex Wood Glue D1 25Kg	-
1772135	Pattex Wood Glue D1 50Kg	-
1701066	Pattex Wood Glue D1 200Kg	-

White synthetic resin glue based on PVAC

Joining wood with varnished or plastic-laminated surfaces makes high demands on the quality and performance of the adhesive. It is therefore recommended to use high-quality adhesives like Pattex that ensure reliable bonding results. Pattex Wood Classic is recommended for assembling and repairing all kind of wood elements; heavy wood, light wood, cork carpentry, cardboard and paper. Great for all indoor projects. Water-based, solvent-free and really strong, Pattex Wood Classic gets the job done properly.


CONTACT ADHESIVE TRANSPARENT



PATTEX CONTACT ADHESIVE TRANSPARENT, is a fast drying, clear contact adhesive. PU(Polyurethane) based formula. Free of harmful substances. The bond leaves no traces of glue – best used for clear surfaces or colored materials. With a shorter evaporation time, it can be used quickly and flexibly. Best suited for indoor use. Sticks quickly and is heat resistant. Pattex Transparent is not suitable for bonding plastics such as Polyethylene, Polypropylene and Teflon.

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Transparent bond
- ✓ Strong
- ✓ Universal
- ✓ Fast curing

PACKAGING INFORMATION


Product Code	Product Description	Pieces/ Carton
177379	Pattex Contact Adhesive 50g (transparent)	12

WOOD EXPRESS GLUE D2



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Short setting time
- ✓ High heat resistance

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1419309	Pattex Wood Express Glue D2 75g	12
1419310	Pattex Wood Express Glue D2 250g	12
1419311	Pattex Wood Express Glue D2 750g	6
1419265	Pattex Wood Express Glue D2 5kg	1

White synthetic resin glue based on PVAC

Fast setting glue for all types of bonding and hot and cold edge bonding, for assembly bonding applications (carcass bonding) for joints (solid wood and board joints) veneer and plastic edge banding, except PVC, ABS and polyester edging not untreated or not sanded on rear side surface area bonding, HPL boards etc.



MONTAGE ADHESIVES



THE MOST POWERFUL ADHESIVES FOR INDOOR AND OUTDOOR CONSTRUCTION APPLICATIONS

MONTAGE ADHESIVES

THROW YOUR TOOLS AWAY...
JUST GLUE IT!




MONTAGE ADHESIVE PL 100



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Indoor applications
- ✓ High initial tack
- ✓ Paintable
- ✓ High final strength

Pattex PL100 is for all absorbent substrates and indoor applications, provides extra high initial tack (>100 kg/m²), High final strength (> 6 N/mm²), Solvent-free, Over-paintable, Bridges gaps up to 10 mm, Corrections possible within the first 15 min. Neutral odour. For bonding skirting boards made of wood and PVC. For fixing decorative mouldings and ceiling roses. For securing wall panels and insulation boards.

PACKAGING INFORMATION


Product Code	Product Description	Pieces/ Carton
1797916	Pattex PL 100 (Acrylic Dispersion) 380g	12

MONTAGE ADHESIVE PL 150 SOLVENT TECHNOLOGY



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Indoor & outdoor use
- ✓ Instant tack
- ✓ Permanent bond

Advanced, professional adhesive, with solvent based technology for indoor & outdoor use. Pattex PL150 is INSTANT TACK Solvent based formula. No need to flash the solvent, Delivers immediate bonding to substrate without additional steps or waiting, No need to support joints with mechanical fixings, Over paintable once dry, Water resistant, Low odor. Compatible with all absorbent and non-absorbent substrates.

PACKAGING INFORMATION


Product Code	Product Description	Pieces/ Carton
1797913	Pattex PL 150 (Solvent Technology) 380g	12

MONTAGE ADHESIVE PL 200 FLEXTEC® POLYMER



SCOPE OF USE

Recommended for bonding a wide variety of materials:

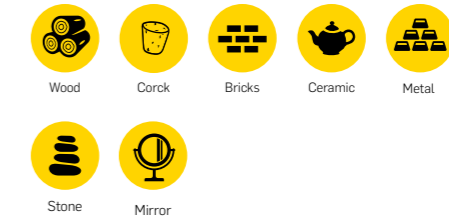

- ✓ Fix & seal
- ✓ Instantly bonds
- ✓ High immediate tack

The Flexible way to Seal and Bond with PATTEX PL200 Construction Adhesive is a professional polymer-based construction adhesives with high immediate tack that instantly bonds, fixes and seals a wide variety of building materials inside and outside buildings (up to 50kg/m). It is weather- and ageing-resistant, Solvent- and isocyanate-free, Over-paintable and sandable, Neutral odour, Low shrinkage.

*What is Flextec?

FLEXTEC® Polymer based INSTANT TACK is the revolutionary Henkel solution for all BONDING, FIXING & SEALING applications for the widest variety of building materials. With Flextec, Henkel has developed a new, patented basic technology for producing especially user-friendly and environmentally compatible adhesives and sealants. This technology makes use of silane-terminated polymers which allow targeted adjustment of adhesive and sealant properties such as tack and elasticity.

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1797915	Pattex PL 200 Flextec® Polymer 480g (white)	12
1797914	Pattex PL 200 Flextec® Polymer 380g (transparent)	12



PROFESSIONAL SEALANTS

THE ALL NEW ACRYLIC, ACETIC AND NEUTRAL SILICONES

PROFESSIONAL SEALANTS

EXCELLENT WEATHERABILITY

FLEXIBLE SEAL

SEAL-BOND-FILL

FAST CURING

CRACK FREE



NEW

SEALANTS FT101



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Multipurpose sealant & adhesive
- ✓ High initial tack
- ✓ Recommended for sealing of windows or door frames
- ✓ Sandable & paintable
- ✓ No shrinkage

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1983803	Pattex Sealants FT101 380g (Transparent)	12


All purpose, one-part, moisture curing, elastic joint sealant and multipurpose adhesive for indoor and outdoor applications based on Flextec®-Technology. Pattex FT101 provides excellent adhesion to a wide range of construction materials without primer, good elasticity - complies with ISO11600-F-25HM (movement capability 25%), high initial tack, can be applied to damp surfaces without bubbling or losing adhesion (unlike PU sealants), UV, weather and ageing resistance - no surface cracking or crazing or yellowing, silicone free, solvent-free, sandable, good gunnability even at low temperatures, no shrinkage during curing, good compatibility with paints - can be painted after curing.

NEUTRAL SILICONE CONSTRUCTION SN312



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Indoor & outdoor use
- ✓ Non staining
- ✓ High flexibility

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1784980	Pattex Neutral Silicone(Construction SN312) 280ml (white)	24
1787077	Pattex Neutral Silicone (Construction SN312) 280ml (black)	24
1787078	Pattex Neutral Silicone (Construction SN312) 280ml (grey)	24
1787076	Pattex Neutral Silicone (Construction SN312) 280ml (beige)	24
1787080	Pattex Neutral Silicone (Construction SN312) 280ml (sand)	24


PATTEX NEUTRAL SILICONE Construction SN312 is highly recommended for interior and exterior sealing applications, such as external weather seals, construction/movement joints and perimetral joints in buildings and other types of construction.

NEUTRAL SILICONE GLAZING AND METAL SN322



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Flexible seal
- ✓ Recommended for sealing of windows or door frames

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1786097	Neutral Silicone (Glazing And Metal SN322) 280ml (transparent)	24
1787079	Neutral Silicone (Glazing And Metal SN322) 280ml (Black)	24
1784981	Neutral Silicone (Glazing And Metal SN322) 280ml (White)	24


NEUTRAL SILICONE Glazing and Metal SN322 is a one-part, non-staining sealant, that provides flexible seal. Pattex (Glazing and Metal SN322) neutral curing silicone sealant ideally used for sealing of PVC-U, glass, glazed surfaces and brickwork. It is highly recommended for glazing and the perimeter sealing of window and door frames.

ACETIC SILICONE GENERAL PURPOSE SL212



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Anti-fungal
- ✓ Good chemical resistance
- ✓ Water proof

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1719790	Pattex Acetic Silicone (General Purpose SL212) 280ml (transparent)	25
1719466	Pattex Acetic Silicone (General Purpose SL212) 280ml (White)	25
1719465	Pattex Acetic Silicone (General Purpose SL212) 280ml (Black)	25

PATTEX ACETIC SILICONE General Purpose SL212 is Anti-Fungal, Good adhesion to a variety of non-porous substrates, resistant ultra-violet radiation, Waterproof, good chemical resistance, excellent elasticity. Pattex SL212 is ready-to-use silicone sealant for general purpose sealing and glazing applications (indoor and outdoor). It is suitable for bonding and repairing properties of a wide variety of joints (joints in bath tubs, wash basins, shower cabins, kitchen, toilets, aluminum profiles and tiles), it cures at room temperature and in the presence of air moisture to form a flexible and resistant joint. Standards: Complies with ISO 846-B, level 2.

ACRYLIC SILICONE WALL AND CEILING AC244



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Long lasting
- ✓ Indoor & outdoor use
- ✓ Over paintable

PACKAGING INFORMATION

ACRYLIC SEALANT (Wall and Ceiling AC244) is ideally used for the long-lasting and over-paintable sealing of cracks, joints and gaps in interior and exterior applications.


Product Code	Product Description	Pieces/ Carton
1787142	Pattex Acrylic Silicone Wall And Ceiling AC244 280ml (White)	24

HIGH TEMPERATURE RTV SILICONE



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ High temperature (up to 300°C)
- ✓ High elasticity
- ✓ UV resistant

PACKAGING INFORMATION

Multipurpose Silicone Sealant for High Temperature Applications: PATTEX RTV is a one component, high heat resistance up to 300°C, non-slumping silicone sealant. It delivers high elasticity, high load capacity, and UV resistant. It is used to seal oven belts, heating elements in appliances, flanged pipe joints, access doors, drying vents and other applications where extra heat resistance is required.

Product Code	Product Description	Pieces/ Carton
1616354	Pattex Sealants RTV Silicone 90ml (black)	12 (inner) 144 (outer)
1617427	Pattex Sealants RTV Silicone 90ml (blue)	12 (inner) 144 (outer)
1617428	Pattex Sealants RTV Silicone 90ml (red)	12 (inner) 144 (outer)
1617429	Pattex Sealants RTV Silicone 90ml (grey)	12 (inner) 144 (outer)

UNIVERSAL SILICONE



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Resistant to cleaning products
- ✓ Anti-fungal

PACKAGING INFORMATION

General Purpose Joint Sealant for Indoor and Outdoor Use: PATTEX ACETIC SILICONE Universal is an acetic cure, Anti-Fungal, Flexible, waterproof, excellent resistance against conventional cleaning products and chemicals. Pattex Universal is ready-to-use silicone for a range of general sealing and glazing applications (indoor and outdoor). It is suitable for use on common non-porous building materials (sealing kitchen furniture, plumbing fixtures, doors and windows)


Product Code	Product Description	Pieces/ Carton
1592243	Pattex Sealants Universal Silicone 280ml (white)	24
1598665	Pattex Sealants Universal Silicone 280ml (transparent)	24
1692562	Pattex Sealants Universal Silicone 280ml (black)	24

SANITARY SILICONE



SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Anti-fungal
- ✓ Chemical resistant
- ✓ Temperature resistant (up to +120°C)

PACKAGING INFORMATION

Anti-Fungal, Joint Sealant for Sanitary Applications: PATTEX ACETIC SILICONE Sanitary is Anti-Fungal, Fast curing, excellent adhesion, excellent resistance against conventional cleaning products and chemicals, resistant to extreme temperatures (- 30°C to +120°C). Pattex Sanitary sealant is formulated for general purpose glazing and sealing applications where long term reliability is required. It will bond to form a durable, flexible waterproof seal on many common wet area building materials such as joints in bath tubs, wash basins, shower cabins.

Product Code	Product Description	Pieces/ Carton
1592242	Pattex Sealants Sanitary Silicone 280ml (white)	24
1598666	Pattex Sealants Sanitary Silicone 280ml (transparent)	24



PU FOAMS

FOR THE LONG LASTING AND RELIABLE INSULATION, SEALING AND FILLING OF JOINTS, GAPS AND CRACKS

**CONTAINS FLAME
RETARDANT ADDITIVE**

**RESISTANT TO ALL
WEATHER CONDITIONS**



PU FOAMS





SUPER GLUES

POWERFUL INSTANT BONDING SOLUTIONS FOR RELIABLE BONDING OF A WIDE RANGE OF MATERIALS

TRANSPARENT BOND

60SEC. FIXTURE TIME FOR VERTICAL USE

NON-DRIP FORMULA FLEXIBLE BOND



SUPER GLUES



HVAC SOLUTIONS

HIGH PERFORMANCE SEALANTS, COATING AND ADHESIVES FOR ALL GI SHEET INSULATIONS

UV RESISTANT AND WASHABLE

ANTI FUNGUS

FIRE RESISTANT

Contact Adhesive
Bonding the rock wool to the GI sheet

Lag Coating
Canvas cloth dipped in the lag coating and placed above the rock wool

Acrylic Sealant
Sealing the G.I Sheets joints together

HVAC SOLUTIONS



POWER EPOXIES

HIGH BONDING POWER & FAST CURING TIME, EPOXY GLUES ARE WELL SUITED FOR PRECISE & DEMANDING JOBS

DOES NOT SHRINK

MULTI-PURPOSE

EXTREMELY FAST

STRONG REPAIR ADHESIVE

FAST REPAIR
FOR BROKEN HINGERS & WATER LEAKS IN PIPES



POWER EPOXIES



POWER EPOXY SYRINGE CLEAR



NEW

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Very fast (1min.)
- ✓ Multipurpose
- ✓ Does not shrink
- ✓ Sandable, polished, drilled

- ✓ Fast (5min.)
- ✓ Multipurpose
- ✓ Does not shrink
- ✓ Sandable, polished, drilled

PATTEX POWER EPOXY Instant Mix 1 Minute: Very reactive, two component, solvent-free, epoxy based adhesive, in syringe (+Static mixer) format. Cured adhesive can be sandpapered, polished, drilled, machined and coated. Multipurpose, very Fast, strong Repair adhesive, does not shrink, nor expand, when curing, good resistance to water, oil and common solvents.

PATTEX POWER EPOXY Universal 5 Minutes: Reactive, two component, solvent- Free, epoxy based adhesive, in syringe (+Static mixer) format. Cured adhesive can be sandpapered, polished, drilled, machined and coated. Multipurpose, Fast, transparent Repair adhesive, ideal for glass does not shrink, nor expand, when curing, good resistance to water, oil and common solvents.

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1476720	Pattex Power Epoxy Syringe universal Clear 6ml (2x11ml) (1min)	6
611294	Pattex Power Epoxy Syringe UniversalClear 25ml(5mins)	12


POWER EPOXY UNIVERSAL REPAIR TUBE



NEW

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Fast (5min)
- ✓ Multipurpose
- ✓ Sandable, polished, drilled

PATTEX POWER EPOXY Universal 5 Minutes Tubes: Reactive, two component, solvent-Free, epoxy based adhesive, in tube format. Cured adhesive can be sandpapered, polished, drilled, machined and coated. Multipurpose, Fast, Clear, Repair adhesive, does not shrink, nor expand when curing, good resistance to water, oil, and common solvents.

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
866010	Pattex Power Epoxy Universal Repair Tube (2 x 11ml) (5mins)	12

POWER EPOXY METAL REPAIR TUBE



NEW

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Fast (5min)
- ✓ Fast repair adhesive for metal
- ✓ Does not shrink
- ✓ Sandable, polished, drilled

PATTEX POWER EPOXY Metal 5 Minutes: Reactive, two component, solvent-free, epoxy based metal adhesive, in tubes format. Cured adhesive can be sandpapered, polished, drilled, machined and coated Fast repair adhesive for metals, does not shrink, nor expand, when curing, good resistance to water, oil and common solvents.

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
866008	Pattex Power Epoxy Clear Repair Universal (2 x 11ml) (5 mins)	12


POWER EPOXY PUTTY REPAIR EXPRESS



NEW

SCOPE OF USE

Recommended for bonding a wide variety of materials:



- ✓ Glues, refills, seals
- ✓ Fast
- ✓ Sandable, polished, drilled

PATTEX REPAIR Express: Reactive, solvent-Free, epoxy based co-axial Putty. Cured adhesive can be sandpapered, polished, drilled, machined and coated. Glues, refills and seals, Fast. High resistance, easy to knead and apply.

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
867591	Pattex Power Epoxy Putty Repair Express 48g	108



WALLPAPER ADHESIVES & PASTES

Since 1953



HIGH QUALITY READY TO USE WALLPAPER ADHESIVE



EASY APPLICATION



EXCELLENT INITIAL TACK



MOISTURE RESISTANT



METYLAN NORMAL



SCOPE OF USE

Ideal for light, normal and heavy paper based wallpaper.



- ✓ High adhesion power
- ✓ Lump free consistency
- ✓ Odourless
- ✓ Strong & permanent bond
- ✓ High yield

PACKAGING INFORMATION

Metylan Normal is a wallpaper paste which is ideal for light, normal and heavy paper based wallpaper.

Product Code	Product Description	Pieces/ Carton
72181	Metylan Normal 125g	40

METYLAN SPECIAL - FOR HEAVY WALLPAPER



SCOPE OF USE

Ideal for embossed, structured, woodchip, vinyl, heavy paper based and special wallpaper, including non woven / fleece wall coverings and lining paper.



- ✓ Strong initial tack
- ✓ Enhanced bonding strength
- ✓ Adjustable after application
- ✓ Lump free consistency

PACKAGING INFORMATION

Metylan Special is a wallpaper paste that is ideal for embossed, structured, woodchip, vinyl, heavy paper based and special wallpaper, including non-woven / fleece wall coverings and lining paper.

Product Code	Product Description	Pieces/ Carton
72201	Metylan Normal 200g	40

OVALIT TM - READY MIX WALLPAPER PASTE



SCOPE OF USE

Recommended for bonding a wide variety of wallpapers:



Textile wall coverings Metallic wall coverings PVC wall coverings

- ✓ Ready to use adhesives
- ✓ Heavy wallpapers
- ✓ High bonding strength

PACKAGING INFORMATION


Metylan Ovalit is a high quality ready to use wallpaper adhesive paste for efficient adhesion of heavy demanding wallcoverings (e.g. textile wall coverings, metallic wallpaper and PVC wall coverings with textile backing (DIN EN 233 and 234), non woven wallcoverings (DIN EN 233 and 234), non woven for repair and refurbish, glass fabric and wide object wallcoverings (width up to 1,40m).

Product Code	Product Description	Pieces/ Carton
44566	Metylan Ovalit TM 5Kg	-
44567	Metylan Ovalit TM 10Kg	-

METYLAN DUFIX CRACK-FILLER



SCOPE OF USE



Crack filling Levelling

- ✓ Levelling uneven surfaces
- ✓ Filling cracks & holes
- ✓ Securing seating for hooks (wall)
- ✓ Indoor use
- ✓ Sandable

PACKAGING INFORMATION

Ideal for filling cracks, holes, levelling uneven surfaces and perfect for modelling. Suitable for stone, plaster and concrete. For indoor use only.

Product Code	Product Description	Pieces/ Carton
83001	Metylan Dufix Crack-Filler 1.5Kg	10

WALLPAPER REMOVER



NEW

SCOPE OF USE



All types of wallpapers

- ✓ Fast
- ✓ Efficient wallpaper remover
- ✓ Odourless

PACKAGING INFORMATION

Fast and efficient removal of wallpapers 1, 2 (DIN EN 233 / 234). Excellent paper and non woven penetration, speeds up wallpaper removal, high efficiency, odourless, solvent-free.

Product Code	Product Description	Pieces/ Carton
387342	Metylan Wallpaper Remover 500mL	12

OPTALIN



SCOPE OF USE

Ideal for light, normal and heavy paper based wallpaper.



- ✓ High initial tack
- ✓ Lump free consistency
- ✓ Odourless

PACKAGING INFORMATION

Wallpaper Paste for Light, Normal and Heavy Paper Based Wallpaper: Optalin is a High grade methylcellulose wallpaper adhesive powder, provides high initial tack, Lump free consistency, Odourless and free of preservative compositions, and very easy to use.

Product Code	Product Description	Pieces/ Carton
1703471	Pattex Optalin 125g	40



PIPE ADHESIVES, CLEANER AND SEALING CORDS

**NEW RELIABLE TECHNOLOGY FOR
SEALING THREADED PIPES**



YEARS OF CERTIFIED PERFORMANCE
IN PIPING SOLUTIONS



**NO MORE
HEMP FIBER**



**NO MORE
PTFE-TAPES
(TEFLON®)**



**TANGIT
UNI-LOCK**



TANGIT UPVC ALL PRESSURE



SCOPE OF USE



UPVC Pipes

- ✓ High pressure (up to 16 bars)
- ✓ Gap filling properties

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
182753	Tangit UPVC All Pressure 125g	12
414546	Tangit UPVC All Pressure 250g	12
44354	Tangit UPVC All Pressure 500g	12
406517	Tangit UPVC All Pressure 1000g	6
333455	Tangit UPVC All Pressure 500g (with Brush)	12
406488	Tangit UPVC All Pressure 1000g (with Brush)	6
1852099	Tangit UPVC All Pressure 125g (with Dauber)	36
1852080	Tangit UPVC All Pressure 250g (with Dauber)	24
1852082	Tangit UPVC All Pressure 500g (with Dauber)	12
1852079	Tangit UPVC All Pressure 1000g (with Dauber)	8

Available with Dauber & Brush

The bonded joints are as resistant as the respective pipe material. Tangit PVC-U pipe systems, is suitable for joints resistance to shear strain of pressure pipes (e.g. drinking water and gas pipes) with PVC-U fittings. Open time of 4 minutes, Suitable for pressure up to 16 bars, temperature durability from 0°C up to +60°C.

TANGIT SANITARY MEDIUM PRESSURE



SCOPE OF USE



UPVC Pipes

- ✓ Medium pressure (up to 6 bars)
- ✓ Resistant to bacteria
- ✓ Temperature resistance (up to +60°C)

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1852098	Tangit Sanitary Medium Pressure 125g (with Dauber)	36
1852088	Tangit Sanitary Medium Pressure 250g (with Dauber)	24
1852097	Tangit Sanitary Medium Pressure 500g (with Dauber)	12
1643828	Tangit Sanitary Medium Pressure 1kg (with Dauber)	8

Available with Dauber only

The bonded joints are as resistant as the respective pipe material. Tangit PVC-U Sanitary, suitable for joints resistant to tensile strain of medium pressure pipes. Suitable for joints resistant to shear strain of pressure pipes (e. g. drinking water) with PVC-U, for gluing cable conduits, drain pipes etc. Fast curing, It assures maximum leak protection, Excellent gap-filling properties, Hot and cold water pipes (60°C), Resistant to bacteria, Medium pressure (6 bars).

TANGIT PIPE CLEANER FOR UPVC/CPVC/ABS



SCOPE OF USE



UPVC Pipes CPVC Pipes ABS Pipes

- ✓ Removes residues
- ✓ Safe and reliable
- ✓ Prepares the surface

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
44271	Tangit Pipe Cleaner for UPVC/CPVC/ABS 1L	12

Tangit cleaner is a cleaning agent, used to clean surfaces of pipes and fittings made of PVC-U, PVC-C and ABS before bonding, removes residues, safe and reliable.

TANGIT CPVC ALL PRESSURE



SCOPE OF USE



CPVC Pipes

- ✓ High pressure (up to 16 bars)
- ✓ Temperature resistance (up to +80°C)
- ✓ High chemical resistance

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
1776527	Tangit CPVC All Pressure 125g (with Dauber)	36
1613185	Tangit CPVC All Pressure 250g (with Dauber)	24
1624674	Tangit CPVC All Pressure 500g (with Dauber)	12
1799476	Tangit CPVC All Pressure 1000g (with Dauber)	8

Available with Dauber only

The bonded joints are as resistant as the respective pipe material. Tangit PVC-C pipe systems, is suitable for joints with corrosive and high temperature environment (e.g. industrial applications/ chemical processing plants). Open time of 1 minute, Suitable for pressure up to 16 bars, temperature durability from 0°C up to +80°C Easy bonding, even of larger dimensions (one person sufficient for pipes up to 80 mm), Easy and clean handling, Higher security thanks to excellent gap-bridging capability (low flow value). Maximum leak protection, Very high chemical resistance.

TANGIT UNILOCK



SCOPE OF USE

Recommended for sealing a wide variety of materials:



Metal pipe Plastic pipe

Metal and Plastic threads acc. ISO 7-1 up to 4" in water, gas and compressed air piping systems.

- ✓ Maximum leakage protection
- ✓ Replaces hemp fibre and tapes
- ✓ Easy adjustable

PACKAGING INFORMATION

Product Code	Product Description	Pieces/ Carton
382913	Dispenser (20m)	288
320287	Dispenser (80m)	20
634243	Dispenser (160m)	20

Tangit UNI-LOCK Pipe Sealing Cord is a general-purpose sealant for threaded pipes. It is used for sealing threaded components (ISO 7-1) such as pipe couplings and fittings with tapered / cylindrical threads. The application range includes cold and hot water supply pipes (up to 130°C) as well as gas pipes. The cord is particularly suited for threaded joints that require immediate tightness after assembly and may need small readjustments before use.



GIVES YOU THE POWER

MORE INFORMATION NEEDED? www.pattex-pro.ae

